

## The Breakthrough of Mobile Memory

Apacer microSD 3.0 UHS-I card series presents new generation of mobile memory. By complying with SD System Specification version 3.0 and the latest UHS-I (Ultra High Speed – I) standard, the mobile storage cards are becoming even faster in data transfer and larger in capacities. The microSD cards are highly suitable for smart phone and other mobile usages where speed and capacities are critical for high-definition multimedia files or Apps.

The UHS standard is a recently announced standard by the SD specification association aimed at handling powerful Apps, high resolution images and UltraHD videos. Besides a speed boost, Apacer microSD 3.0 UHS-I series comes in various capacities, offering the right memory space for precious pictures and videos, as well as useful Apps.



### Applications

- Smart phone
- Tablet PC
- Other devices with microSD slot

### Features:

- Supports SD System Specification Version 3.0
- Supports SDHC up to 32 GB; SDXC up to 2 TB;
- UHS-I: Ultra High Speed-I **3** (minimum transfer speed over 30MB/s), ideal for useful Apps and high resolution images and Ultra HD videos
- UHS-I: Ultra High Speed-I **1** (minimum transfer speed over 10MB/s), ideal for 3D and Full HD videos
- Applicable for smart phones other devices with microSD card slot.
- ECC

## General Product Specifications

Specifications	
Interface	microSD Specification Version 3.0
Interface speed	UHS-I  (Indicate Speed Class 3 on UHS-I Interface)
	UHS-I  (Indicate Speed Class 1 on UHS-I Interface)
	Class 10 (Indicate SD Speed Class when used with a device that does not support UHS Interface)
Capacity*	8GB-128GB
Form Factor	SDHC or SDXC
Operating Voltage	2.7V to 3.6V
Dimensions	(L)15 x (W)11 x (H) 1 mm
Temperature	Operating     -25°C to 85°C
	Storage        -40°C to 85°C
Humidity	Operating: RH=93% under 25°C non-condensing
	Storage: RH=93% under 40°C non-condensing
Durability	Minimum 10,000 insertion/removal cycles
Warranty	Limited product lifetime warranty
Certifications	RoHS, CE, FCC, VCCI, RCM

\*Unformatted. Theoretically, 1GB=1,000,000,000 Bytes. Under operating systems, the capacity might appear to be less than the theoretical capacity because the calculation in OS is based on 1 GB = 1024 MB / 1MB =1024KB and a minority of the capacity is reserved for maintenance purposes.

### Global Offices

#### Taiwan (HQ)

**Apacer Technology Inc.**  
 1F., No.32, Zhongcheng Rd.,  
 Tucheng Dist.,  
 New Taipei City 236, Taiwan  
 R.O.C.  
 Tel: 886-2-2267-8000  
 Fax: 886-2-2267-2261  
[amtsales@apacer.com](mailto:amtsales@apacer.com)

#### U.S.A

**Apacer Memory America, Inc.**  
 46732 Lakeview Blvd.  
 Fremont, CA 94538  
 Tel: 408-518-8626  
 Fax: 510-249-9551  
[sa@apacerus.com](mailto:sa@apacerus.com)

#### Japan

**Apacer Technology Corp.**  
 5F, Matsura Bldg., Shiba,  
 Minato-Ku  
 Tokyo, 105-0014, Japan  
 Tel: 81-3-5419-2668  
 Fax: 81-3-5419-0018  
[jpservices@apacer.com](mailto:jpservices@apacer.com)

#### Europe

**Apacer Technology B.V.**  
 Science Park Eindhoven  
 5051 5692 EB Son,  
 The Netherlands  
 Tel: 31-40-267-0000  
 Fax: 31-40-267-0000#6199  
[sale@apacer.nl](mailto:sale@apacer.nl)

#### China


**Apacer Electronic (Shanghai) Co., Ltd**  
 1301, No.251, Xiaomujiao  
 Road, Shanghai,  
 200032, China  
 Tel: 86-21-5529-0222  
 Fax: 86-21-5206-6939  
[sales@apacer.com.cn](mailto:sales@apacer.com.cn)

#### India

**Apacer Technologies Pvt Ltd,**  
 # 535, 1st Floor, 8th cross,  
 JP Nagar 3rd Phase,  
 Bangalore – 560078, India  
 Tel: 91-80-4152-9061  
[Sales\\_india@apacer.com](mailto:Sales_india@apacer.com)

## Electrical Interface

- Card Architecture

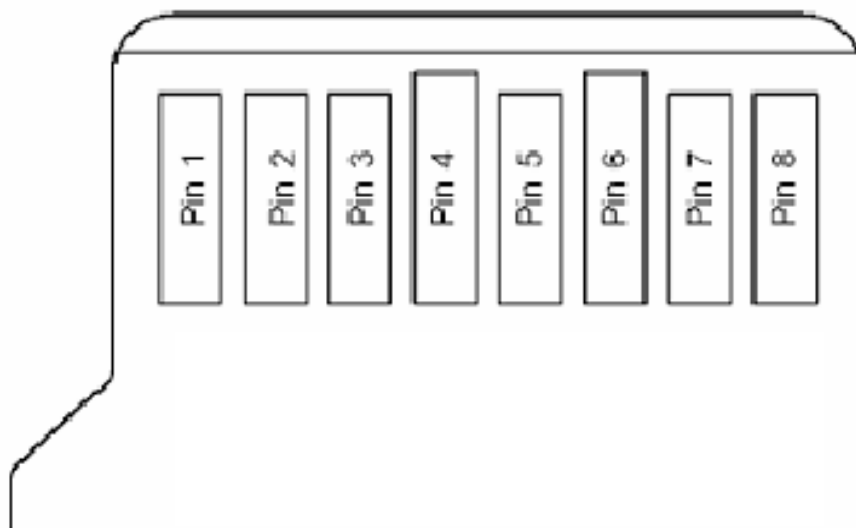

- Pin Assignment

Pin	SD Mode		SPI Mode	
	Name	Description	Name	Description
1	<i>DAT2</i>	Data Line [Bit 2]	<i>RSV</i>	<i>Reserved</i>
2	<i>CD/DAT3</i>	Card Detect/ Data Line [Bit 3]	<i>CS</i>	Chip Select (neg true)
3	<i>CMD</i>	Commend/ Response	<i>DI</i>	Data In
4	<i>VDD</i>	Supply voltage	<i>VDD</i>	Supply voltage
5	<i>CLK</i>	Clock	<i>SCLK</i>	Clock
6	<i>VSS</i>	Supply voltage ground	<i>VSS</i>	Supply voltage ground
7	<i>DAT0</i>	Data line [Bit 0]	<i>DO</i>	Data out
8	<i>DAT1</i>	Data line [Bit 1]	<i>RSV</i>	<i>Reserved</i>

## Physical Dimensions

- Physical Mechanical Outline**

Dimensions Card Package	11mmx15mm Min. 10.9mmx14.9mm Max.11.1mmx15.1mm
Thickness	1.0mm +/- 0.1mm
Surface	Plain (except contact area)
Edges	Smooth edges
Inverse insertion	Protection on right corner (top view)

## Ordering Information

Speed	Capacity	P/N
UHS-I U1 Class10	8GB	AP8GMCSH10U1-X
	16GB	AP16GMCSH10U1-X
	32GB	AP32GMCSH10U1-X
	64GB	AP64GMCSX10U1-X
	128GB	AP128GMCSX10U1-X
UHS-I U1 Class10 R/W: 85/10MB/s	16GB	AP16GMCSH10U5-X
	32GB	AP32GMCSH10U5-X
	64GB	AP64GMCSX10U5-X
	128GB	AP128GMCSX10U5-X

## Revision History

Version	Description	Date
0.1	Preliminary release	06/14/2013
0.2	Added Class x as speed class Removed Write Protect mechanical switch Revised the dimensions	06/24/2013
0.3	Defined interface speed class as Class 10 Added ECC in Features	06/26/2013
0.4	Updated address of Taiwan headquarter	10/14/2013
0.5	Revised features and General Product Specifications	11/06/2014
0.6	Added new part number	02/25/2015
0.7	Revised features, Specifications and PN	03/11/2015
0.8	Revised Capacity	06/22/2015
0.9	Added Electrical interface and dimensions	07/14/2016
1.0	Added new part number	01/11/2017
1.1	Revised certifications and temperature	11/24/2017
1.2	Revised Part Number List	09/20/2019
1.3	Updated address of American office information	10/21/2019
1.4	Revised Dimension Content and Added Durability	12/10/2019

### Apacer Technology Inc.

1F, No.32, Zhongcheng Rd., Tucheng District,  
New Taipei City, Taiwan, R.O.C  
Tel: +886-2-2267-8000 Fax: +886-2-2267-2261  
www.apacer.com

Copyright © 2014 Apacer Technology Inc. All Rights Reserved.  
Information in this document is subject to change without prior notice.  
Apacer and the Apacer logo are trademarks or registered trademarks of Apacer Technology Inc. Other brands,  
names, trademarks or registered trademarks may be claimed as the property of their respective owners.